APB Automatic Spacer Bending Machine

Maximum Performance

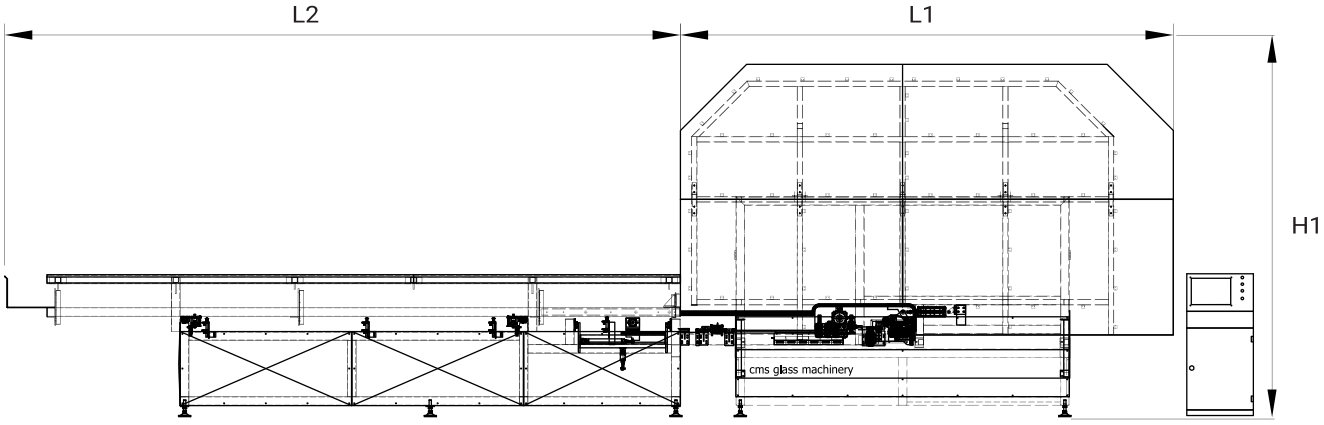

	T - Spacer	L - Spacer	W - Spacer	L1	L2	H1
APB	6-24 mm	2000 mm	2500 mm	4400 mm	6080 mm	2600 mm

For sizes over 2000 mm, operator supervision is required.

Tecnical Features

	Min. Frame Size	Max. Frame Size	Spacer Thickness	Spacer Magazine Quantity	Bending Allowance
APB	250x250 mm	2000x2000 mm	6-24 mm	4	± 0,3 mm

The images are for illustrative purposes only and designed to be a representation of general orientation of the proposed projects. It is the exclusive property of CMS and STRICTLY CONFIDENTIAL, shall not be reproduced, copied, or communicated to a third party without prior written authorization. CMS Makine San. Trade Inc. reserves the right to make changes to this document. - REV250322 -

APB Automatic Spacer Bending Machine

Key Features

Automatic Spacer Bending Machine is designed for fully automatic bending of bendable type aluminum spacers with different thicknesses used in the production of insulated glass. Optimization software provides minimum waste.

Rectangular and Shaped Spacer Bending

Mass Spacer Bending

Bending Optimization

Full Automatic Spacer Bending with Servo Motor Technology

You can automatically bend your spacers in desired sizes with our servo motor technology soulutions.

Recipe Management

Save your datas and settings



Operator Panel

Take control under favor of user friendly operator panel



Remote Access

Remote access feature provides advanced online assistance and troubleshooting

Unlimited Spacer Bending with Automatic Spacer Insertion System

This feature allows the bending process is always fed with spacer and minimum spacer wastage is provided.

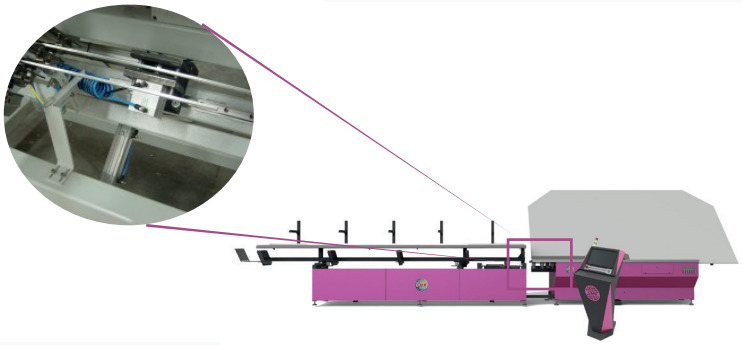

Stock Magazine for Different Types of Spacers

Thanks to spacer magazines, different spacer types and thicknesses can be stored. Magazine changes can be made at any time according to the type of spacer to be bent.

The images are for illustrative purposes only and designed to be a representation of general orientation of the proposed projects. It is the exclusive property of CMS and STRICTLY CONFIDENTIAL, shall not be reproduced, copied, or communicated to a third party without prior written authorization. CMS Makine San. Trade Inc. reserves the right to make changes to this document. - REV250322 -

Optional Features

Opt.GFH
Automatic Argon Gas Hole Driling

Automatic argon gas hole drilling feature can be implemented to the machine.

Opt.VTR - Data Transfer from Glass Cutting Machines or ERP Software

This infrastructure allows us to transfer spacer details from either CMS or different brand cutting machine to the bending machine. Data transfer can also be done through your ERP system. For our solutions, please consult to your sales representative.

Opt.SSB - Shaped Spacer Bending

Shaped spacer bending option from CMS shape library

The images are for illustrative purposes only and designed to be a representation of general orientation of the proposed projects. It is the exclusive property of CMS and STRICTLY CONFIDENTIAL, shall not be reproduced, copied, or communicated to a third party without prior written authorization. CMS Makine San. Trade Inc. reserves the right to make changes to this document. - REV250322 -