SM Desiccant Filling Machine

CMS

Durability

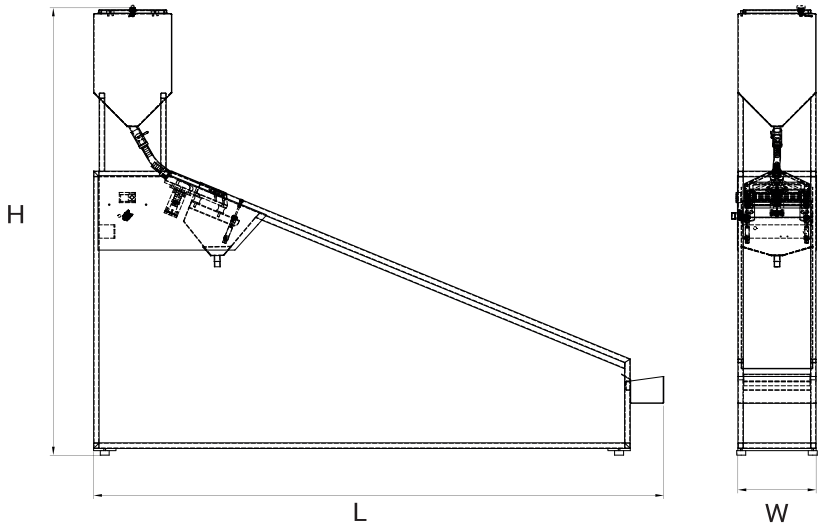

	W	L	H
SM	400 mm	2550 mm	2000 mm

Desiccant Filling Machine is used for filling silica material, which is an anti-moisture material, in aluminum spacer used in the production of insulated glass.

Electrical Heating **Multiple Spacer Filling** **Material Tank**

Complete Filling with Vibration

Pneumatic system ensures to fill the spacers with desiccant completely and quickly.

Excess Material Collecting Unit

Material collecting tank prevents you to waste overflowed desiccants.
It collects and re-uses it for filling.

Material Flow Observation

You can observe the desiccant filling to the spacers during filling and keep the filling process under control.

Technical Features

	Tank Capacity
SM26	25 kg

The images are for illustrative purposes only and designed to be a representation of general orientation of the proposed projects. It is the exclusive property of CMS and STRICTLY CONFIDENTIAL, shall not be reproduced, copied, or communicated to a third party without prior written authorization. CMS Makine San. Trade Inc. reserves the right to make changes to this document. - REV250322 -