CKM Tilting Glass Breaking Table

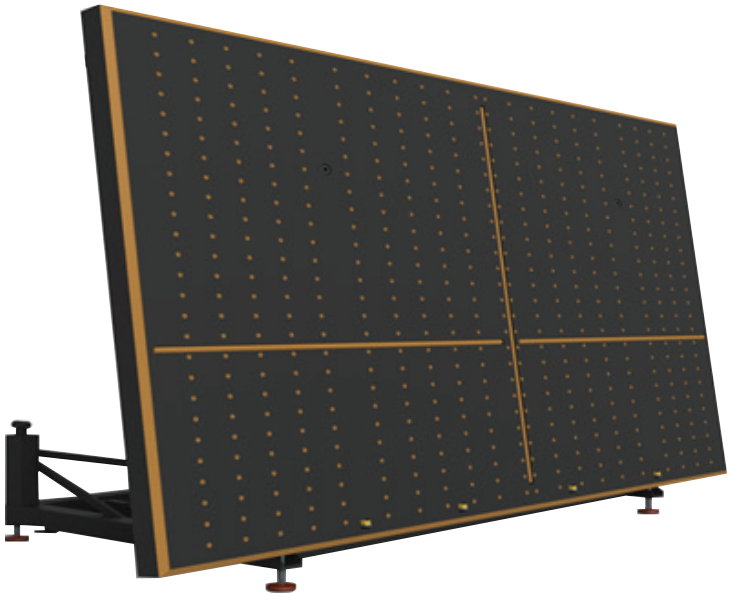

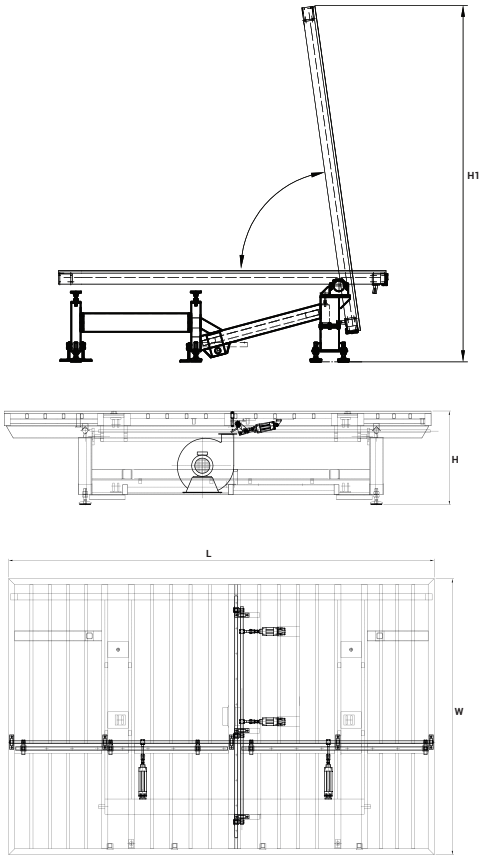

	W	L	H	H1
CKM3700	2750 mm	4200 mm	950 mm	2950 mm
CKM6000	3500 mm	7000 mm	950 mm	3900 mm

Tilting Glass Breaking Table is designed to break cut glass sheets manually and also for unloading big glass sheets. The table is equipped with hydraulic system and has the tilting feature. Equipped pneumatic breaker bars in x and y direction is used for breaking the cut glass. The breaker bars controlled by foot pedal and activated by the operator. The table surface is covered by felt for easy glass moving on the table and ensure the glass is protected from the damage

Technical Data

	Maximum Glass Size	Glass Thickness	Breaking Table Fan/Power	Breaking Bars (X+Y)
CKM3700	3700x2550 mm	3 -19 mm	1x3 kW	2+1
CKM6000	6000x3210 mm	3 -19 mm	2x3 kW	3+1

Features

- Air cushion system for eliminating surface friction,
- Breaking bars controlled by pneumatic system in X axis and Y axis to separate the cut glass
- Vibration and balance taken fan structure,
- High flow rate and pressure fan structure
- Homogeneous air distribution system tray on the table surface,

The images are for illustrative purposes only and designed to be a representation of general orientation of the proposed projects. It is the exclusive property of CMS and STRICTLY CONFIDENTIAL, shall not be reproduced, copied, or communicated to a third party without prior written authorization.