# OCKM Automatic Glass Cutting Table

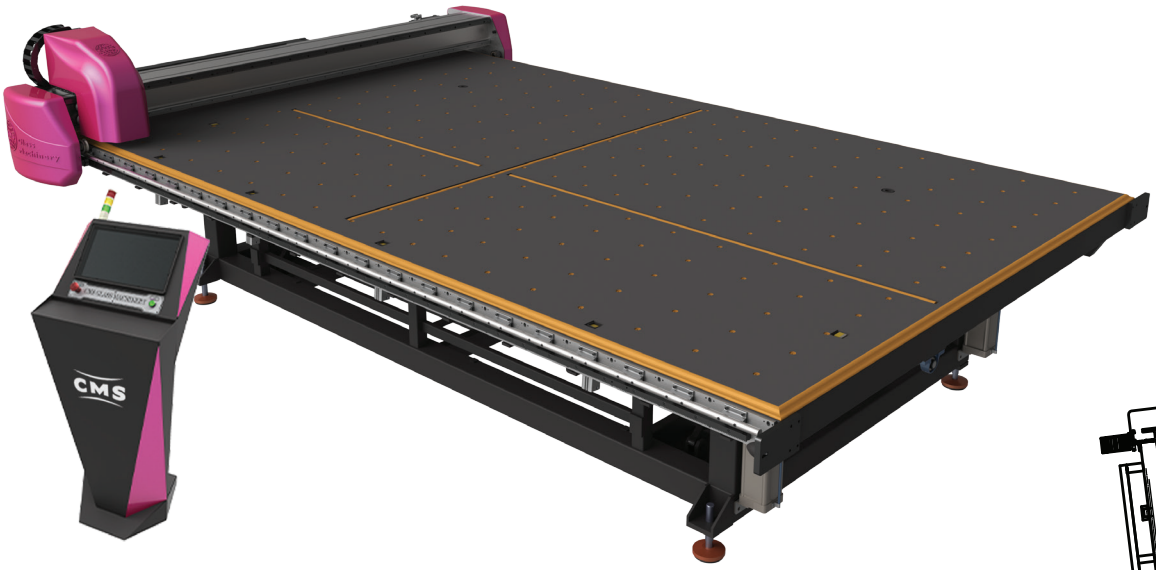


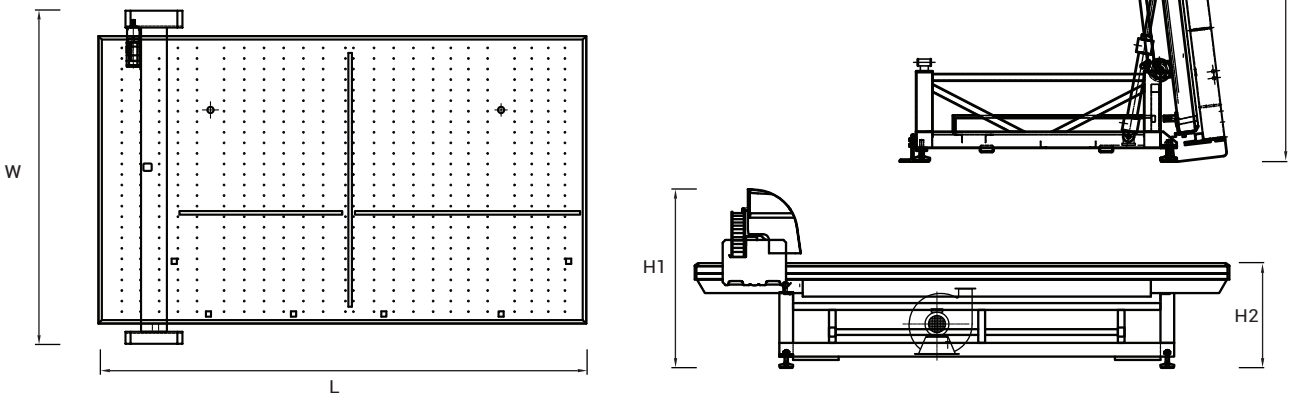


| | W | L | H | H1 | H2 |
|---|---|---|---|---|---|
| **OCKM3700** | 3200 mm | 4700 mm | 3300 mm | 1500 mm | 920 mm |
| **OCKM6000** | 4000 mm | 7000 mm | 4200 mm | 1500 mm | 920 mm |

*Please contact to your sales representative for different size requests.*

## Technical Features

| | Maximum Glass Size | Glass Thickness | Maximum Cutting Speed | Cutting Tolerance | Breaking Bars | Brush / Low-E Deletion Speed | Wheel / Low-E Deletion Speed |
|---|---|---|---|---|---|---|---|
| **OCKM3700** | 3700x2550 mm | 3-19 mm | 150 m/min | ± 0.20 mm | 1+1 | 130 m/min (max.) | 80 m/min (max.) |
| **OCKM6000** | 6000x3210 mm | 3-19 mm | 150 m/min | ± 0.20 mm | 2+1 | 130 m/min (max.) | 80 m/min (max.) |



*The images are for illustrative purposes only and designed to be a representation of general orientation of the proposed projects. It is the exclusive property of CMS and STRICTLY CONFIDENTIAL, shall not be reproduced, copied, or communicated to a third party without prior written authorization. CMS Makine San. Trade Inc. reserves the right to make changes to this document. - REV221006 -*

# OCKM Automatic Glass Cutting Table

## System Configuration

We would like to introduce our OCKM series designed with high sense of quality and years of expertise to sustain smooth flat glass cutting experience.

### *A- Automatic Glass Cutting Table*

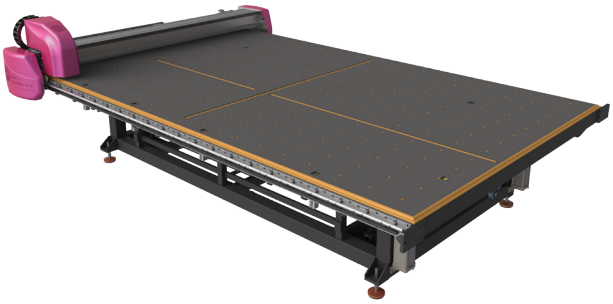

It is used for automatic cutting of straight, shaped or soft coated (Low-E) glass sheets. It can be configurated according to your needs under favor of its integrated features.

- Soft glass tilting system
- Maximum sensitivity, minimum cutting tolerance
- Fast, strong and stable cutting performance
- Minimum surface friction through air cushion system

### *B- Breaking Bars*

If you wish to minimize your investment, then you can get effective results by the help of breaking bars mechanism integrated to the cutting machine.

- Manual glass breaking and seperation process on X and Y axes.

| | OCKM3700 | OCKM6000 |
|---|---|---|
| Quantity of breaking bars (X+Y) | 1+1 | 2+1 |
| | *Please contact your sales representative for different size requests.* | |

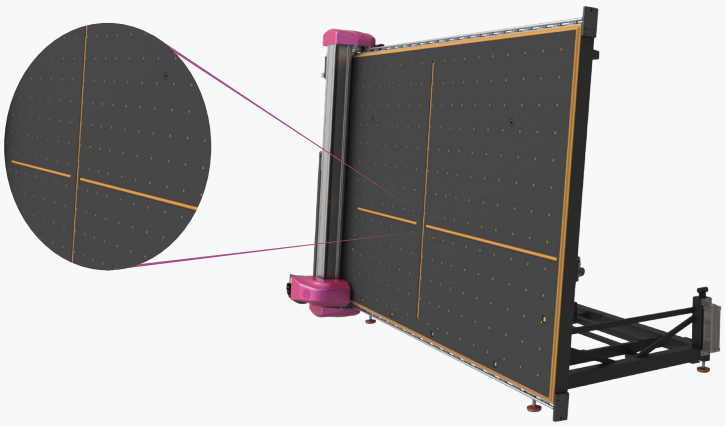

### *C- Tilting Table*

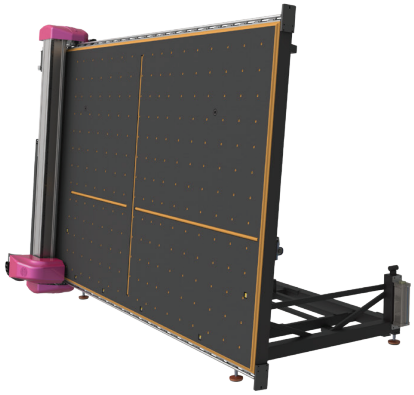

**Would you like to use your plant spaces effective?**
You don't need an additional machine or space for glass loading and unloading process by the help of the tilting feature.


*The images are for illustrative purposes only and designed to be a representation of general orientation of the proposed projects. It is the exclusive property of CMS and STRICTLY CONFIDENTIAL, shall not be reproduced, copied, or communicated to a third party without prior written authorization. CMS Makine San. Trade Inc. reserves the right to make changes to this document. - REV221006 -*

# OCKM Automatic Glass Cutting Table

## Key Features

### Straight & Shaped Glass Cutting

Automatic Glass Cutting Table is designed to cut straight and shaped glasses at high speed.

### & Automatic Speed and Pressure Setting

Automatic speed and pressure adjustment feature offers excellent glass cutting experiences for different glass thickness and shapes.

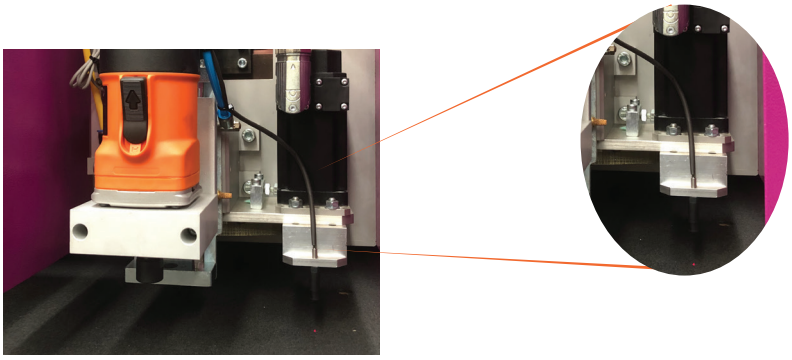

### Automatic Glass Alignment

The system automatically senses the position of the glass and aligns the cutting plan ensuring minimum final loss by the help of automatic glass alignment feature.

### Recipe Management

Save your datas and settings

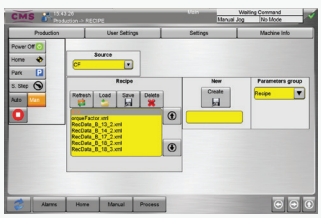

### Operator Panel

Take control under favor of user friendly operator panel

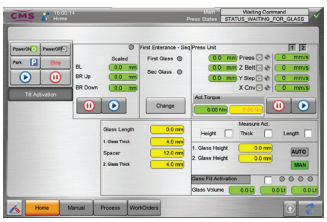

### Remote Access

Remote access feature provides advanced online assistance and troubleshooting

- Origin point for laminated glass cutting
- Vibration-free operation thanks to heavy and robust steel construction structure



*The images are for illustrative purposes only and designed to be a representation of general orientation of the proposed projects. It is the exclusive property of CMS and STRICTLY CONFIDENTIAL, shall not be reproduced, copied, or communicated to a third party without prior written authorization. CMS Makine San. Trade Inc. reserves the right to make changes to this document. - REV221006 -*

# OCKM Automatic Glass Cutting Table

CMS

## Optional Features

**Opt. GKM. LGS**
Laser Glass Scanner

**Opt. GKM. GGS**
Safety Barrier

**Opt. GKM. VGC**
Vinyl Glass Cutting

### Opt. GKM. BED
Brush / Low-E Edge Deletion

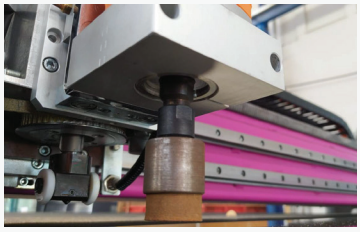

### Low-E
Edge Deletion

In both metal brush and grinding wheel deletion methods, either flat or shaped soft coated (Low-E) glasses can be deleted at very high speeds.

### Opt. GKM. WED
Grinding Wheel / Low - E Edge Deletion

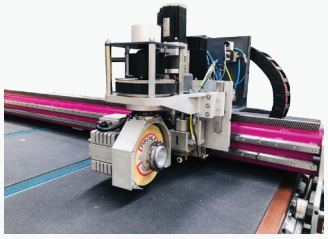

### Opt.KM
Fixed Glass Breaking Table

### Breaking Table

The best solution for increasing your production capacity and effectiveness of your cutting machine.

### Opt.CKM
Tilting Glass Breaking Table

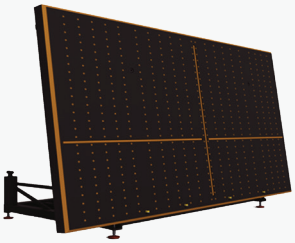

### Opt. GKM. LMS Label / Glass Marking System

This feature provides marking of each cut glass piece by labeling.

### Opt. GKM. VGC Vinyl Glass Cutting

With this function, the layer on vinyl coated glasses is precisely cut in any desired size and design with a special cutting head. After the vinyl cutting process, the glasses are passed through the glass sandblasting machine and only the desired drawing is transferred to the glass.



*The images are for illustrative purposes only and designed to be a representation of general orientation of the proposed projects. It is the exclusive property of CMS and STRICTLY CONFIDENTIAL, shall not be reproduced, copied, or communicated to a third party without prior written authorization. CMS Makine San. Trade Inc. reserves the right to make changes to this document. - REV221006 -*